



exocet[®] ANTI BUG (X01947XB)

managing fuel quality

DESCRIPTION

Fuel soluble biocide and preservative.

FOR PROFESSIONAL USE ONLY

APPLICATION

The first sign of microbiological contamination (the 'diesel bug') is often continuous blocking of filters with a slimy substance, which can range in colour from black to light brown.

Exocet[®] Anti Bug is used to tackle current and immediate microbiological infestation at a "Kill" dose. The same product, Exocet[®] Anti Bug, can be used to inhibit microbiological activity in clean tanks at a "Protect" dose. Detailed dosage rates are presented in a table on page 2. The additive can be used in bulk fuel storage or added directly into a vehicle or machine fuel tank.

BENEFITS



FEATURES

- ◆ Broad spectrum additive covering a variety of bacteria, viruses, fungi and yeasts
- ◆ Has an immediate effect and does not add to sludge or slime build-up
- ◆ Clean-up rates are 24-36 hours
- ◆ Eliminates plugging of filters and gauges
- ◆ Protects against tank and pipe corrosion
- ◆ Does not adversely affect fuel combustion or emissions quality
- ◆ Fully compatible with steels, aluminium and zinc and with polyethylene and polypropylene
- ◆ Approved as a fuel additive by: Mercedes Benz, DAF, MAN, NATO, Deutz, Shell, the Swiss Army and others


WHEN TO USE

- ◆ Worried about the 'diesel bug'
- ◆ Fuel contains increasing quantities of bio-content
- ◆ Sludge blocks fuel lines and filters
- ◆ 'Protect' dose prevents bug growth

TREATMENT RATIO

Anti Bug (X01947XB) "Kill" Dose: 1L treats 5,000L
"Protect" Dose: 1L treats 20,000L

All Exocet[®] branded products are available in a range of sizes to 1,000 litres

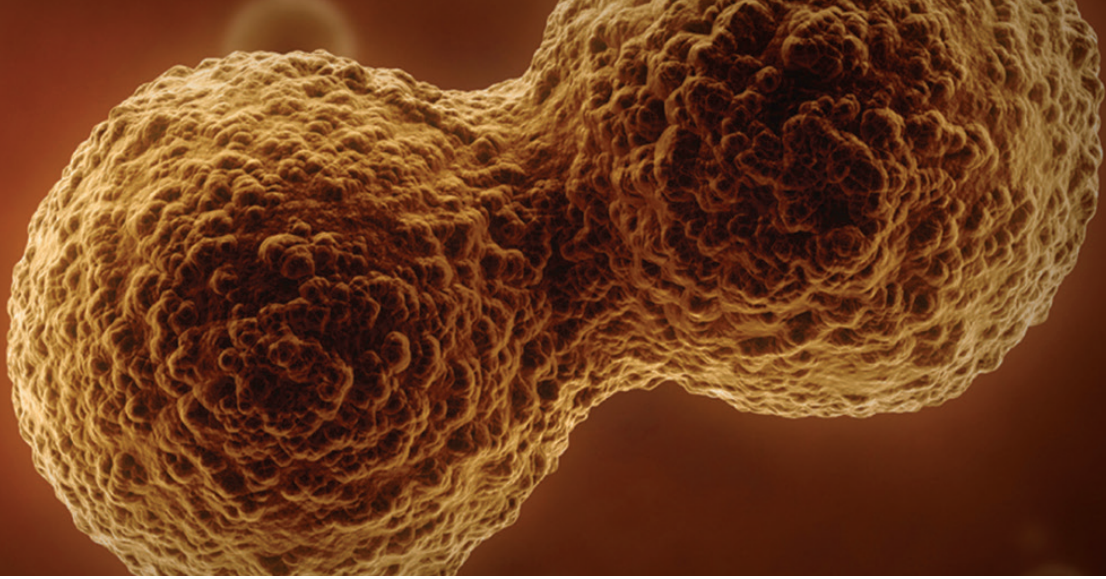

exocet[®] ANTI BUG (X01947XB)

managing fuel quality

RECOMMENDED INSTRUCTIONS FOR USE

Before using Exocet[®] Anti Bug, please read the Safety Data Sheet and wear protective equipment: nitrile gloves; safety glasses, goggles or face shield. Replace the cap on empty bottles and remove to waste.

Store any unused product with the cap tightly replaced and out of reach of children.

Before treating the fuel, ensure that any free water is drained or pumped from the bottom of the fuel tank.

To use the product effectively, it is recommended that the volume of product added is based on the total volume of the tank.

Add the correct volume of product and fill the tank to capacity with new, clean fuel. Leave to stand for 24-36 hours and any micro-organisms will be dead after this time. Use the fuel as normal and after a few days replace the tank or vehicle fuel filters with new ones.

TREATMENT RATES

Exocet [®] Anti Bug	Fuel treated (Litres) at kill dose	Fuel treated (Litres) at protect dosage
50ml	250	1,000
100ml	500	2,000
200ml	1,000	4,000
500ml	2,500	10,000
1,000ml (1 Litre)	5,000	20,000
5 Litres	25,000	100,000
25 Litres	125,000	500,000
200 Litres	1,000,000	4,000,000
1,000 Litres	5,000,000	20,000,000

WHEN TO USE

- Worried about the 'diesel bug'
- Fuel contains increasing quantities of bio-content
- Sludge blocks fuel lines and filters
- 'Protect' dose prevents bug growth

TREATMENT RATIO

Anti Bug (X01947XB) "Kill" Dose: 1L treats 5,000L
 "Protect" Dose: 1L treats 20,000L

All Exocet[®] branded products are available in a range of sizes to 1,000 litres